

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 October 2005 (13.10.2005)

PCT

(10) International Publication Number
WO 2005/094290 A2

(51) International Patent Classification: Not classified

John, A. [US/US]; 29W047 Bode Road, Elgin, Illinois 60120 (US).

(21) International Application Number:
PCT/US2005/010289

(74) Agent: HANLEY, Mark G.; 20 N. WACKER DRIVE, SUITE 4220, CHICAGO, ILLINOIS 60606 (US).

(22) International Filing Date: 28 March 2005 (28.03.2005)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/556,666 26 March 2004 (26.03.2004) US

(71) Applicant (for all designated States except US): TELEFONIX, INC. [US/US]; 2340 ERNIE KRUGER CIRCLE, WAUKEGAN, ILLINOIS 60087 (US).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

(72) Inventors; and


(75) Inventors/Applicants (for US only): BURKE, Paul C. [US/US]; 470 Heather Lane, Lake Forest, Illinois 60045 (US). HOLMES, Mark [US/US]; 52 W. Honeysuckle Drive, Round Lake Beach, Illinois 60073 (US). RUNZEL,

[Continued on next page]

(54) Title: ADJUSTABLE LENGTH CABLING SYSTEMS

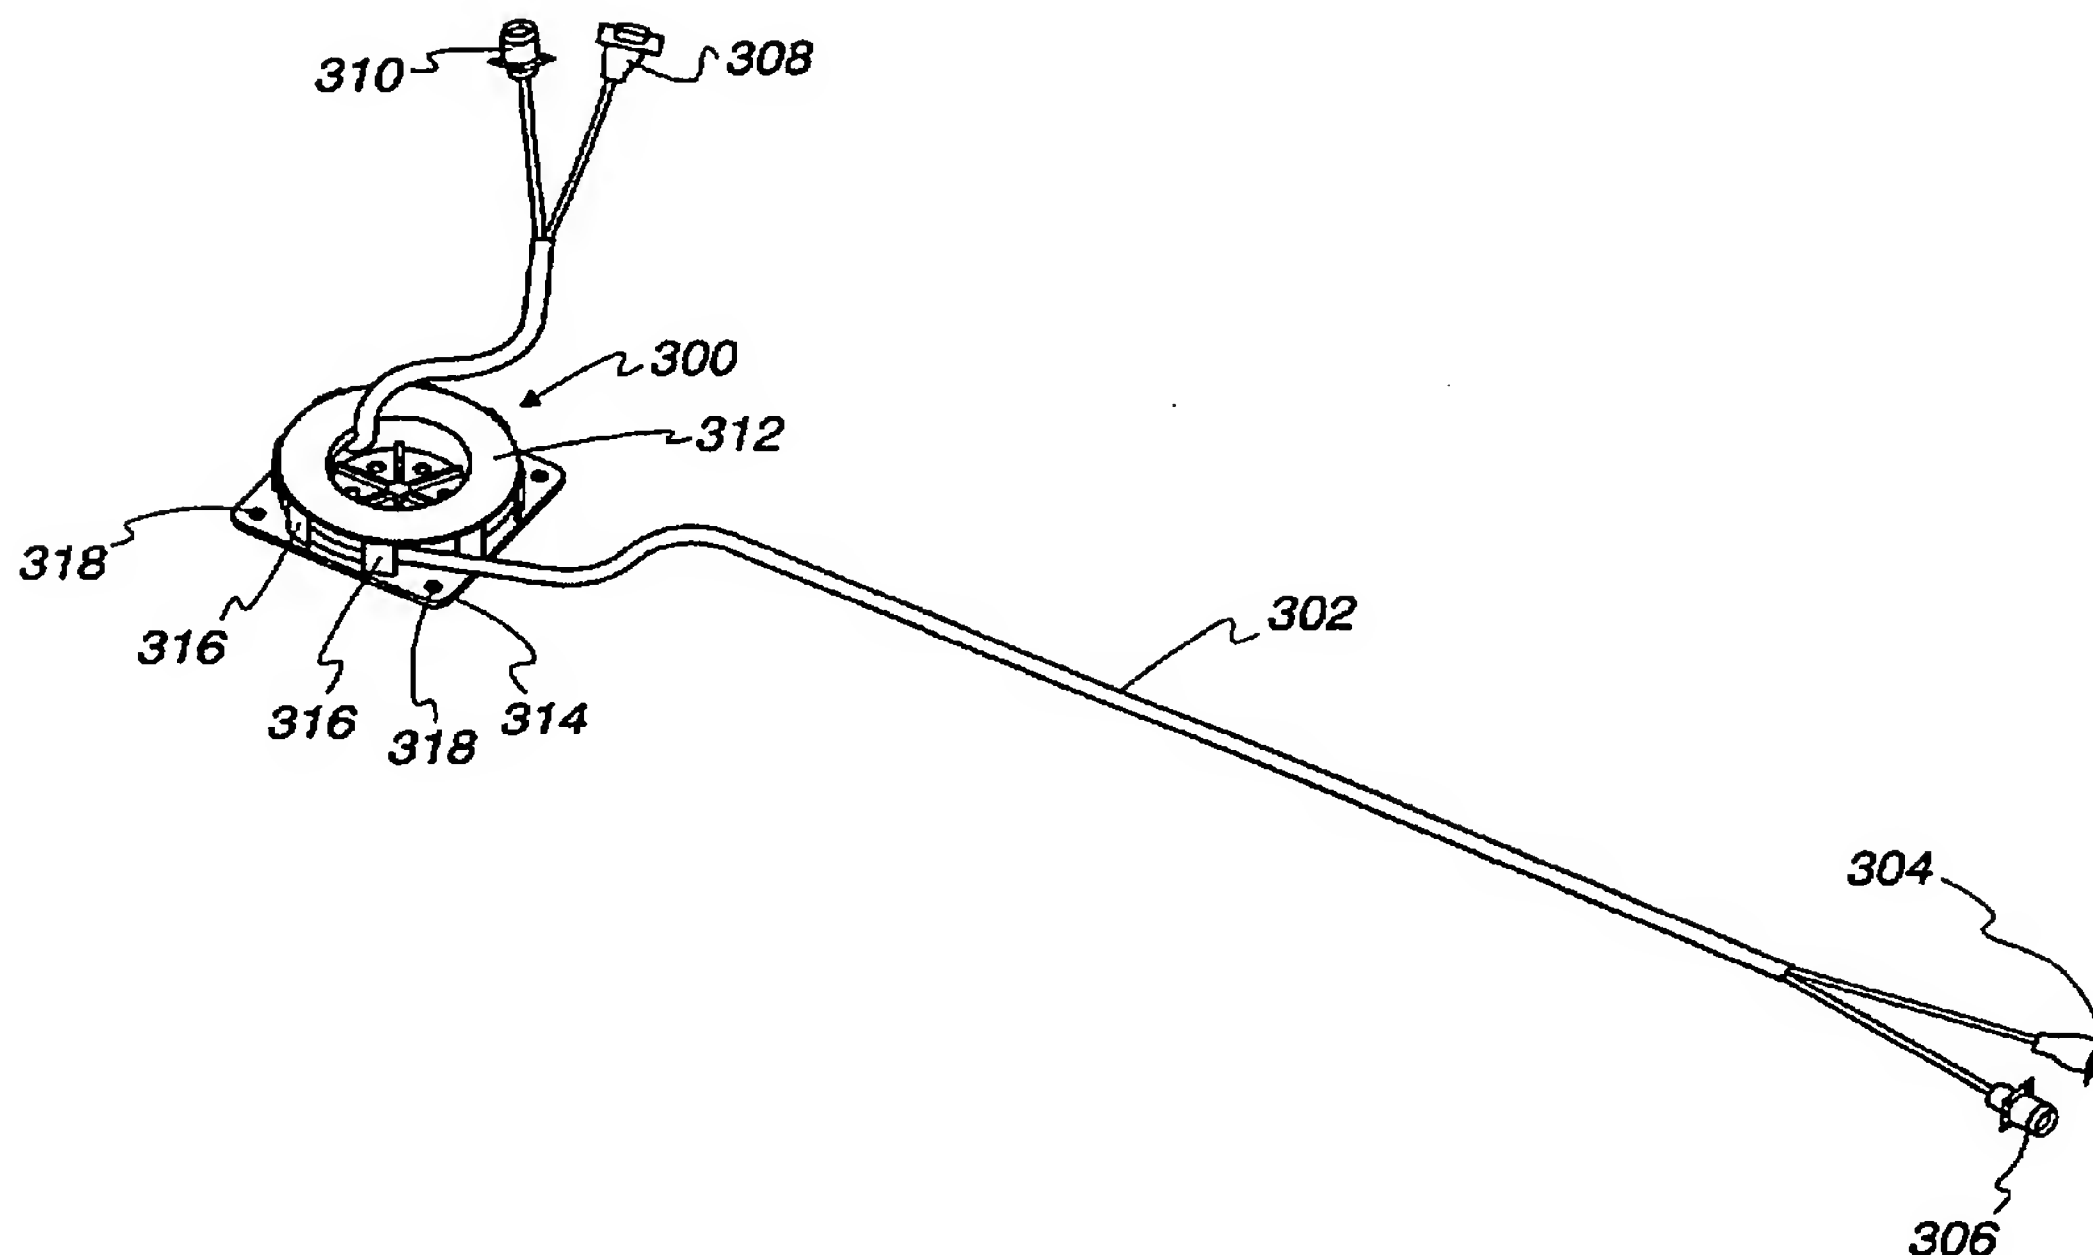

(57) Abstract: Adjustable length cabling systems are disclosed. A disclosed cabling system for use with a passenger vehicle having a plurality of rows of passenger seats includes a multi-conductor cable having a length and first and second ends having respective first and second connectors coupled thereto. The multi-conductor cable is configured to convey electrical signals to at least one of the rows of seats. The disclosed cabling system also includes a cable storage unit configured to hold a coiled portion of the length of the multi-conductor cable. The cable storage unit has a housing portion configured to be mounted underneath at least one of the passenger seats.



WO 2005/094290 A2



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*